O-RING ASSEMBLY GRIPPER, INNER
INSTALLATION SIZE GSI206

▶ PRODUCT SPECIFICATIONS

▶ INCLUDED IN DELIVERY

Centering Disc

DST06510

▶ RECOMMENDED ACCESSORIES

Straight Fittings - Quick Connect Style

GVM5



Magnetic field sensor Angled Cable 5 m

MFS103KHC

Magnetic field sensor Angled Cable 0,3 m - Connector M8

MFS103SKHC

Plug-in connector Angled Cable 5m - Socket M8 (female)

KAW500

Plug-in connector Straight Cable 5m - Socket M8 (female)

KAG500

Plug-in connector customizable Straight - Connector M8

S8-G-3

Plug-in connector customizable Straight - Connector M12

S12-G-3

	▶ Technical Data*
Order no.	**GSI206**
Stroke adjustable per jaw min. [mm]	6
Stroke adjustable per jaw max. [mm]	20
Opening stroke adjustable per jaw min. [mm]	1
Opening stroke adjustable per jaw max. [mm]	6
Stripping stroke [mm]	5
Opening force [N]	240
Possible O-ring diameter at cord size 1 [mm]	11-45
Possible O-ring diameter at cord size 2 [mm]	20-130
Possible O-ring diameter at cord size 3 [mm]	32-130
Possible O-ring diameter at cord size 4 [mm]	42-100
Number of gripping jaws [Quantity]	6
Operating pressure min. [bar]	3
Operating pressure max. [bar]	8
Operating temperature min. [°C]	5
Operating temperature max. [°C]	80
Weight [kg]	1.1

*All data measured at 6 bar

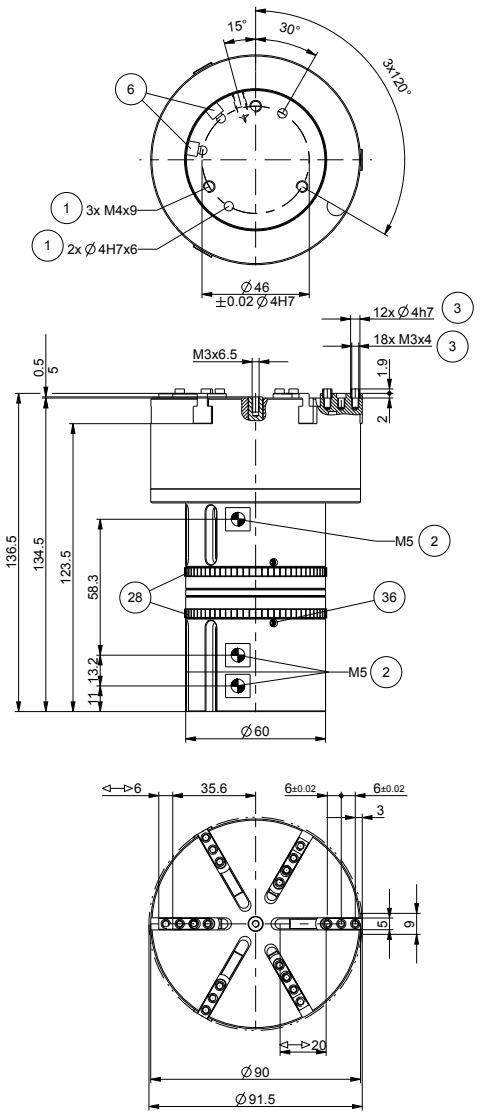

1 Gripper attachment
2 Energy supply
3 Fixing for gripper finger
6 Integrated slot for magnetic field sensor
28 Adjustment ring
36 Arrestor for adjustment ring